

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number  
WO 2005/076249 A3

(51) International Patent Classification:  
*G09F 7/18* (2006.01)      *G09F 13/04* (2006.01)

(74) Agent: DELANEY, Karoline, A.; KNOBBE, MARTENS, OLSON & BEAR, LLP, 2040 Main Street, Fourteenth Floor, Irvine, California 92614 (US).

(21) International Application Number:  
PCT/US2005/003784

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 3 February 2005 (03.02.2005)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPo (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

English

(26) Publication Language: English

English


(30) Priority Data:  
10/771,199      3 February 2004 (03.02.2004) US

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: DISPLAY APPARATUS

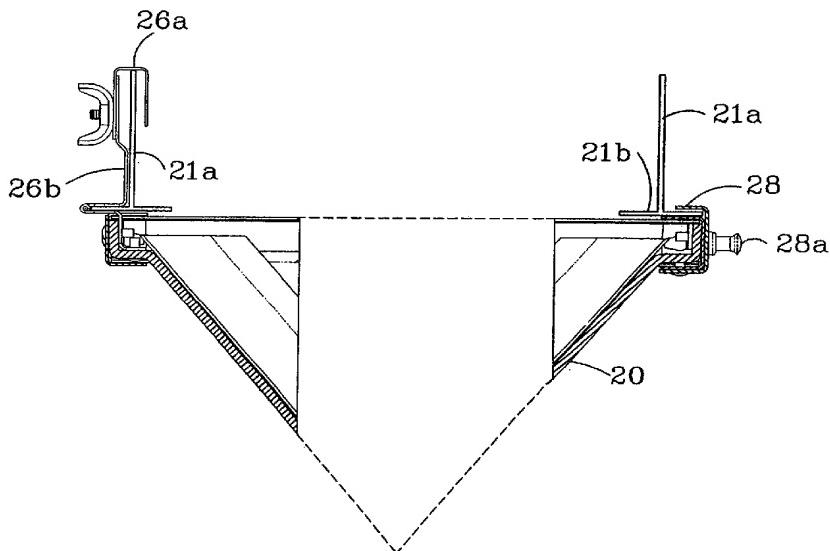

(57) Abstract: A display apparatus is mountable on at least one of a dropped ceiling grid, a ceiling and a wall. The display apparatus is preferably a partially enclosed structure having an open side. In one embodiment, there is at least one hinge-fastener on a first side of the display apparatus adjacent to the open side for attaching said first side to a grid system member and at least one movable fastener on a second side of the display apparatus, preferably opposite said first side, for releasably attaching the second side to a grid system member. In other embodiment, the display apparatus is mounted by a rim extending around the open side of the display apparatus. A removable display unit may be inserted into and removed from the display apparatus replacing information, graphics, and advertisements therein.

WO 2005/076249 A3

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

9 February 2006